




Description

- QINU Suspended tubular light fitting with frosted effect films (design Yann Kersalé)
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 316L
- One-way mirror and prismatic films
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- Gaskets: Gaskets moulded in EPDM


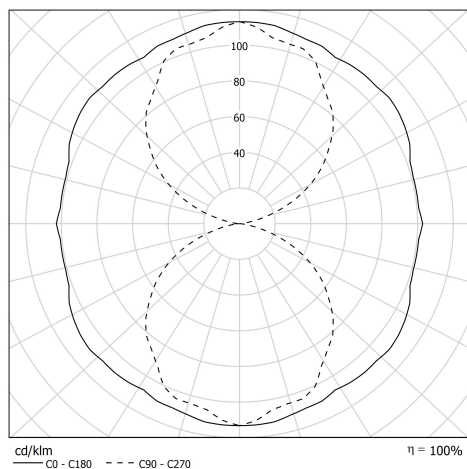


Light specifications and controlling

- Luminous flux: 3200 lm
- Colour temperature: 2700 K
- Constant Current Driver (non-dimmable)

Installation and maintenance

- Diameter: 133 mm
- Total length: 1220 mm
- Provided with 3m 3G1,5 cable with tinned copper meshwork under transparent tubing
- 2 Stainless Steel fixing straps (with variable centre distance)
- Provided with 2 suspension kits including: A ceiling-mounting system, 3m of Ø1.2mm steel wire and self-locking adjustable fixing system for bolt fitted fixing strap
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing

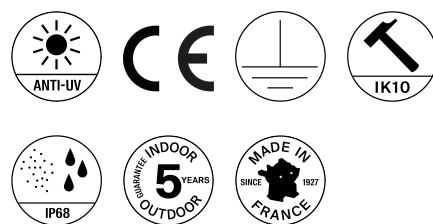

Characteristics

- Warranty : 5 years
- Operating temperature: -20°C to +30°C
- Protection: IP68
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240V 50/60Hz
- Power consumption: 71 W
- Inrush current - Ipeak: 30 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 253 µs
- T°C with incandescent wires: 650°C
- Number of luminaires on automat type B16: 16 pcs
- Weight: 5,2 kg
- Designed and made in France