

## Description



- Floor lamp with flux turned to the ground ELGAR FLOOR
- With tubular tripod structure
- Color: COAL (RAL 7021)
- Internal anodized finishing aluminum gear unit cover : PETROL
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- Longitudinal louvre in aluminum petrol color with inclined lamina
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- COAL (RAL 7021) painted steel structure
- Internal grey lacquered steel gear tray RAL 9006
- Gaskets: Gaskets moulded in EPDM
- Integrated push-button on the end cap

## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 1050 lm
- Colour temperature: 2700 K
- Specific satin-finish primary diffuser optic
- Reversible longitudinal louvre
- Constant Current Driver for dimming by integrated push-button

## Installation and maintenance

- Diameter: 70 mm
- Total length: 995 mm
- Overall diameter: 315 mm
- Overall height: 1170 mm
- Cable entry with nickel-coated brass cable gland for cable Ø 8 - 12 mm
- Supplied with a 2 x 0.75 mm<sup>2</sup> black 2 m cable with a European plug for indoor use
- Delivered pre-assembly to reduce packaging and environmental footprint, while protecting each separate component
- The luminaire is secured to the support structure with the clamps and screws provided (see assembly instructions)
- Closing by tightening the nut on the cable gland
- Closing by tightening the nut on the cable gland
- Quick opening and closing with just one screw
- Patented system with automatic electrical connection/disconnection on closure
- Installation vertical: position cable gland positioned downwards
- Maintenance by removing the end cap and sliding the guided gear plate
- Easily removable LED modules and driver

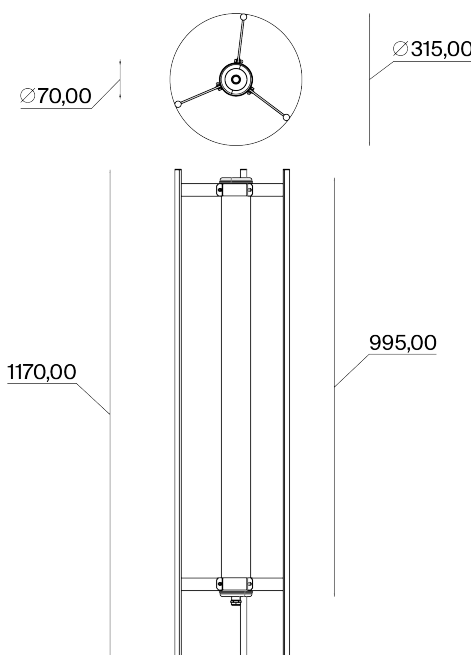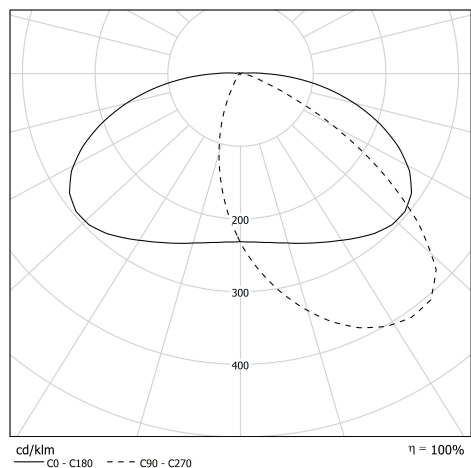



---

## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -20 °C to +35 °C
- Leaktightness of the tubular luminaire : IP65, for indoor use
- Leaktightness of the entire assembly : IP20, for indoor use
- Electrical class: Class II
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 22 W
- Luminous efficacy: 45 lm/W
- Power factor > 0,9
- THD: 11 %
- Photobiological hazard: Group 0
- Inrush current - I<sub>peak</sub>: 17 A
- Peak duration - T<sub>width</sub>: 170 µs
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 28 pcs
- Weight: 5,6 kg
- Designed and made in France