


## Description

- Suspended tubular light BELLEVILLE 133 360° (design: Normal Studio)
- For omnidirectional lighting with trapezoid base perforation grid
- Color: COAL (RAL 7021)
- Grid with COAL finishing
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- End caps & fixing straps: Stainless steel 316L painted COAL (RAL 7021)
- Coal-coloured (RAL 7021) painted aluminium grid inserted between housing and an internal film in opalised white polycarbonate
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- Gear tray: Internal white lacquered steel gear tray
- Passive heat sink in aluminium
- Gaskets: Gaskets moulded in EPDM


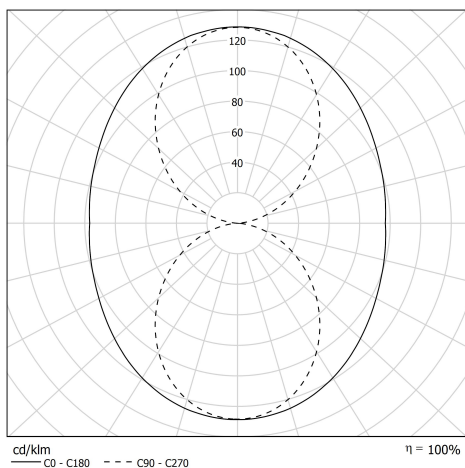


## Light specifications and controlling

- High-efficiency removable LED modules (IRC>80, 3 SDCM)
- Luminous flux: 2000 lm
- Colour temperature: 2700 K
- Specific satin-finish primary diffuser optic
- Driver with constant current output, dimmable by Bluetooth Casambi

## Installation and maintenance

- Diameter: 133 mm
- Total length: 1295 mm
- Cable entry with nickel-coated brass cable gland for cable Ø 5 - 14 mm
- Provided with 3m 3G1,5 cable with tinned copper meshwork under transparent tubing
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Provided with 2 suspension kits including: A ceiling-mounting system, 3m of Ø1.2mm steel wire and self-locking adjustable fixing system for bolt fitted fixing strap
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing
- Quick opening and closing with just one screw
- Patented SLIDE maintenance system
- Removable LED modules and driver

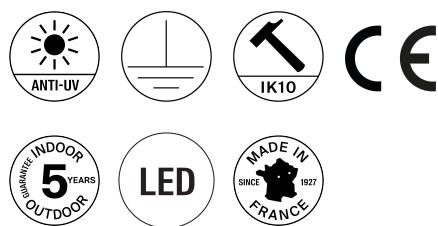

## Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at 25°C
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Electrical class: Class I
- Power supply: 220-240V 50/60Hz
- Power consumption: 42 W
- Inrush current - Ipeak: 23 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 174 µs
- T°C with incandescent wires: 650°C
- Weight: 5,8 kg
- Designed and made in France