




## Description

- MUSSET tubular light fitting
- Color: WHITE (RAL 9010)
- End caps & fixing straps: Stainless steel 316L painted WHITE (RAL 9010)
- Flux-breaker grids in stainless steel, painted WHITE (RAL 9010)
- Anodised aluminium reflector : SILVER
- Ø100 mm borosilicate-glass diffuser
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- Stainless steel gear tray with 2 porcelaine sockets E14
- Moulded EPDM gaskets
- High temperature internal wiring with silicone isolation braided with glass fibre



## Light specifications and controlling

- With 2 clear LED E14 filament lamps (4W 2700K)

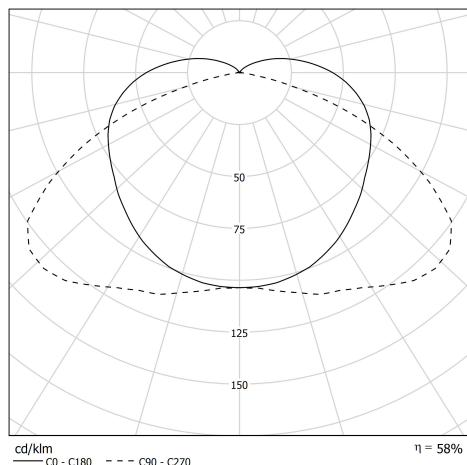

## Installation and maintenance

- Total length: 519 mm
- Provided with 3m 3G1,5 cable with tinned copper meshwork under transparent tubing
- Connection to 3x2,5mm<sup>2</sup> detachable terminal block
- 2 reinforced stainless Steel fixing straps (with variable centre distance) and allowing 360° orientation
- Provided with 2 suspension kits including: A ceiling-mounting system, 3m of Ø1.2mm steel wire and self-locking adjustable fixing system for bolt fitted fixing strap
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing
- Installation in vertical position, cable gland positioned downwards
- Maintenance by releasing the 2 closing screws, removing the end cap and extracting the gear tray

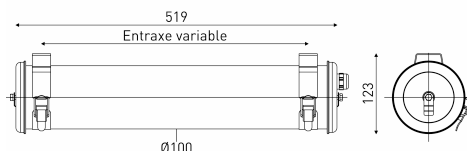

## Characteristics

- Warranty : 5 years
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK07
- Electrical class: Class I
- Power supply: 220-240 V 50/60 Hz
- T°C with incandescent wires: non-flammable
- Weight: 2,7 kg