

AIRMOD Recessed

Pendant light with recessed housing




AIRMOD Recessed

Pendant light with recessed housing



Conceived by the German designer Stefan Diez for Sammode, the AIRMOD Recessed pendant light defies the laws of gravity! With its driver hidden in a false ceiling and the absence of a power cable, this delicate pendant light with its unabashed mechanical allure manages to exude an astonishing impression of weightlessness. Height-adjustable, AIRMOD pendant lights offer freedom of composition, to be placed for example in a cluster above a table, or scattered around a space, constellation-fashion.

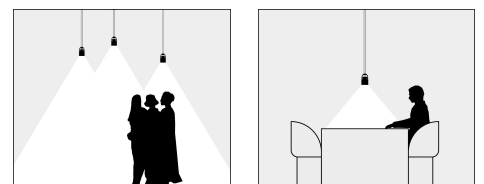




AIRMOD Recessed

Pendant light with recessed housing



Sammode



Perforated collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	AIRMOD RCSD S 900-927 GR-S	88200081	13
Black	Black	AIRMOD RCSD BK 900-927 GR-BK	88200084	13
Champagne	Champagne	AIRMOD RCSD CH 900-927 GR-CH	88200040	13
Bronze	Bronze	AIRMOD RCSD BZ 900-927 GR-BZ	88200041	13

Frosted glass shade version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Frosted	AIRMOD RCSD S 900-927 GL-FR	88200083	13
Black	Frosted	AIRMOD RCSD BK 900-927 GL-FR	88200086	13
Champagne	Frosted	AIRMOD RCSD CH 900-927 GL-FR	88200044	13
Bronze	Frosted	AIRMOD RCSD BZ 900-927 GL-FR	88200045	13










Glass version

900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Clear	AIRMOD RCSD S 900-927 GL-CL	88200082	13
Black	Green	AIRMOD RCSD BK 900-927 GL-GN	88200085	13
Champagne	Amber	AIRMOD RCSD CH 900-927 GL-AM	88200048	13
Bronze	Smoked	AIRMOD RCSD BZ 900-927 GL-SM	88200049	13

Options

Perforated collimator in anodised aluminium	Tempered glass shade	Color temperature
   	    	2700K 3000K 4000K
Silver Black Champagne Bronze	GR-S GR-BK GR-CH GR-BZ Frosted Clear Green Amber Smoked	GL-FR GL-CL GL-GN GL-AM GL-SM
		Lighting management
		Electronic gear unit for DALI 2 dimming Casambi Bluetooth control
		RD RB



AIRMOD Recessed

Pendant light with recessed housing



Sammode

Accessories




Other lengths: consult us

The interchangeable crowns and lenses can be ordered separately. Refer to us


Specification



Photometry



Perforated collimator + Wide Beam Lens



Clear or tinted glass shade + Medium Beam Lens

Design

Designer Stefan Diez

Technical characteristics

Light source CoB LED Module 900 lm (without endcap, IRC>90, 3SDCM)
50 000 h L80/B10 at 25°C
Photobiological hazard : Group 1

Control gear Constant current driver (non-dimmable)

Supply voltage 220-240V 50/60Hz

Electrical class Class I

Operating temperature -5 °C to +35 °C

Easy intallation and maintenance

Connection Prewired driver, fitted with a male-female Wieland coupling

Mounting Hollow wall attachment for tightening, wall thickness : 30 mm max

Installation hole diameter : 83 mm

Empty plenum space 200 x 300 mm, height : 100 mm

Hanging height Suspension wires adjustable in height, up to 3 m.

Materials

Head and covering plate Color anodizing Aluminium, nickel-plated copper hoop

Endcap Perforated collimator : Color anodizing Aluminium
Glass : clear, tinted or frosted tempered glass, according to versions

Lens Tempered glass

Standards

Waterproofness IP20 (indoor use)

Fire resistance 850°C