

# AIRMOD Recessed

Pendant light with recessed housing




# AIRMOD Recessed

Pendant light with recessed housing



Conceived by the German designer Stefan Diez for Sammode, the AIRMOD Recessed pendant light defies the laws of gravity! With its driver hidden in a false ceiling and the absence of a power cable, this delicate pendant light with its unabashed mechanical allure manages to exude an astonishing impression of weightlessness. Height-adjustable, AIRMOD pendant lights offer freedom of composition, to be placed for example in a cluster above a table, or scattered around a space, constellation-fashion.

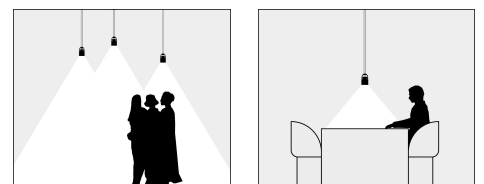




# AIRMOD Recessed

Pendant light with recessed housing



Sammode



## Perforated collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	AIRMOD RCSD S 900-927 GR-S	88200081	13
Black	Black	AIRMOD RCSD BK 900-927 GR-BK	88200084	13
Champagne	Champagne	AIRMOD RCSD CH 900-927 GR-CH	88200040	13
Bronze	Bronze	AIRMOD RCSD BZ 900-927 GR-BZ	88200041	13

## Frosted glass shade version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Frosted	AIRMOD RCSD S 900-927 GL-FR	88200083	13
Black	Frosted	AIRMOD RCSD BK 900-927 GL-FR	88200086	13
Champagne	Frosted	AIRMOD RCSD CH 900-927 GL-FR	88200044	13
Bronze	Frosted	AIRMOD RCSD BZ 900-927 GL-FR	88200045	13

## Glass version

900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Clear	AIRMOD RCSD S 900-927 GL-CL	88200082	13
Black	Green	AIRMOD RCSD BK 900-927 GL-GN	88200085	13
Champagne	Amber	AIRMOD RCSD CH 900-927 GL-AM	88200048	13
Bronze	Smoked	AIRMOD RCSD BZ 900-927 GL-SM	88200049	13

## Options

### Perforated collimator in anodised aluminium



Silver  
Black  
Champagne  
Bronze

### Tempered glass shade



Frosted  
Clear  
Green  
Amber  
Smoked

### Color temperature

2700K	927
3000K	930
4000K	940

### Lighting management

GL-FR	
GL-CL	Electronic gear unit for DALI
GL-GN	dimming
GL-AM	Casambi Bluetooth control
GL-SM	
	RD
	RB



# AIRMOD Recessed

Pendant light with recessed housing



Sammode

## Accessories




Other lengths: consult us  
The interchangeable crowns and lenses can be ordered separately.  
Refer to us


## Specification



### Photometry



Perforated collimator + Wide Beam Lens



Clear or tinted glass shade + Medium Beam Lens

Design	
Designer	Stefan Diez
Technical characteristics	
Light source	CoB LED Module 900 lm (without endcap, IRC>90, 3SDCM) 50 000 h L80/B10 at 25°C Photobiological hazard : Group 1
Control gear	Constant current driver (non-dimmable)
Supply voltage	220-240V 50/60Hz
Electrical class	Class I
Operating temperature	-5 °C to +35 °C
Easy intallation and maintenance	
Connection	Prewired driver, fitted with a male-female Wieland coupling
Mounting	Hollow wall attachment for tightening, wall thickness : 30 mm max
Installation hole	diameter : 83 mm
Empty plenum space	200 x 300 mm, height : 100 mm
Hanging height	Suspension wires adjustable in height, up to 3 m.
Materials	
Head and covering plate	Color anodizing Aluminium, nickel-plated copper hoop
Endcap	Perforated collimator : Color anodizing Aluminium Glass : clear, tinted or frosted tempered glass, according to versions
Lens	Tempered glass
Standards	
Waterproofness	IP20 (indoor use)
Fire resistance	850°C