





With its lacquered aluminium arch frame, available in a wide range of colour combinations, the Astrup lamp offers an effective and convenient option with a stylish finish. This smart table lamp is equipped with a light new-generation tube. You can adjust lighting levels to meet your needs thanks to the dimmer switch: opt for a cosy mellow setting, or set the switch to high when you need to work.



Astrup

Table lamp



Sammode

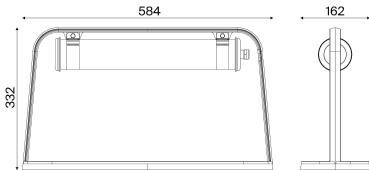


Table lamp

| Structure | Reflector | Flux (lm) | Designation | Code | Watt |
|-----------|-----------|-----------|---|----------|------|
| ● Coal | ● Copper | 700 | ASTRUP 70 COAL COAL CRC 430 700-827 BPI CL1 MR P1 | 80165118 | 13 |
| | ● Brass | 700 | ASTRUP 70 COAL COAL CRB 430 700-827 BPI CL1 MR P1 | 80165125 | 13 |
| | ● Petrol | 700 | ASTRUP 70 COAL COAL CRP 430 700-827 BPI CL1 MR P1 | 80165126 | 13 |
| ● Marsala | ● Silver | 700 | ASTRUP 70 MARS MARS CRS 430 700-827 BPI CL1 MR P1 | 80165127 | 13 |
| ○ White | ● Brass | 700 | ASTRUP 70 WHITE WHITE CRB 430 700-827 BPI CL1 MR P1 | 80165128 | 13 |

Options

Aluminium gear unit cover



Silver
Copper
Brass
Petrol

Materials

Coextruded polycarbonate/PMMA housing for Indoor/Outdoor use (650°)
Polycarbonate housing (960°C)

-
PO

CRS
CRC
CRB
CRP



Astrup

Table lamp




Sammode

Specification



Photometry



Technical characteristics

Light source High-efficiency removable LED module (CRI>80, 3 SDCM)
Color temperature 2700K
50 000 h L80/B10 at 25°C
Photobiological hazard : None (RG0)

Control gear Constant current driver, dimmable by built-in dimming button

Supply voltage 220-240V 50/60Hz

Electrical class Class I

Operating temperature -20°C to +30°C

Easy installation and maintenance

Connection Provided with 4 m 5G1,5 cable with tinned copper meshwork under transparent tubing with a european plug IP44

LED engine maintenance Easily removable LED modules and driver

Materials

Structure Powder-coated aluminium with anti-corrosion treatment for outdoor use

Housing Coextruded polycarbonate/PMMA diameter 70 for indoor and outdoor use

End caps and fixing straps 316L stainless steel

Standards

Waterproofness IP66, IP68

Resistance to IK shocks IK10

Fire resistance 650°C