





With its lacquered aluminium arch frame, available in a wide range of colour combinations, the Astrup lamp offers an effective and convenient option with a stylish finish. This smart table lamp is equipped with a light new-generation tube. You can adjust lighting levels to meet your needs thanks to the dimmer switch: opt for a cosy mellow setting, or set the switch to high when you need to work.



Astrup

Table lamp

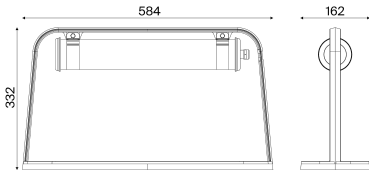


Table lamp

| Structure | Reflector | Flux (lm) | Designation | Code | Watt |
|-----------|-----------|-----------|---|----------|------|
| ● Coal | ● Copper | 700 | ASTRUP 70 COAL COAL CRC 430 700-827 BPI CL1 MR P1 | 80165118 | 13 |
| | ● Brass | 700 | ASTRUP 70 COAL COAL CRB 430 700-827 BPI CL1 MR P1 | 80165125 | 13 |
| | ● Petrol | 700 | ASTRUP 70 COAL COAL CRP 430 700-827 BPI CL1 MR P1 | 80165126 | 13 |
| ● Marsala | ● Silver | 700 | ASTRUP 70 MARS MARS CRS 430 700-827 BPI CL1 MR P1 | 80165127 | 13 |
| ○ White | ● Brass | 700 | ASTRUP 70 WHITE WHITE CRB 430 700-827 BPI CL1 MR P1 | 80165128 | 13 |

Options

Aluminium gear unit cover



Silver
Copper
Brass
Petrol

Materials

Coextruded polycarbonate/PMMA housing for Indoor/Outdoor use (650°)
Polycarbonate housing (960°C)

-
PO

CRS
CRC
CRB
CRP



Astrup


Table lamp



Specification



Photometry



| Technical characteristics | |
|----------------------------------|---|
| Light source | High-efficiency removable LED module (CRI>80, 3 SDCM) Color temperature 2700K 50 000 h L80/B10 at 25°C Photobiological hazard : None (RG0) |
| Control gear | Constant current driver, dimmable by built-in dimming button |
| Supply voltage | 220-240V 50/60Hz |
| Electrical class | Class I |
| Operating temperature | -20°C to +30°C |
| Easy intallation and maintenance | |
| Connection | Provided with 4 m 5G1,5 cable with tinned copper meshwork under transparent tubing with a european plug IP44 |
| LED engine maintenance | Easily removable LED modules and driver |
| Materials | |
| Structure | Powder-coated aluminium with anti-corrosion treatment for outdoor use |
| Housing | Coextruded polycarbonate/PMMA diameter 70 for indoor and outdoor use |
| End caps and fixing straps | 316L stainless steel |
| Standards | |
| Waterproofness | IP66, IP68 |
| Resistance to IK shocks | IK10 |
| Fire resistance | 650°C |