


Belleville

ø133 Suspended light fitting for diffuse 360° lighting




Sammode



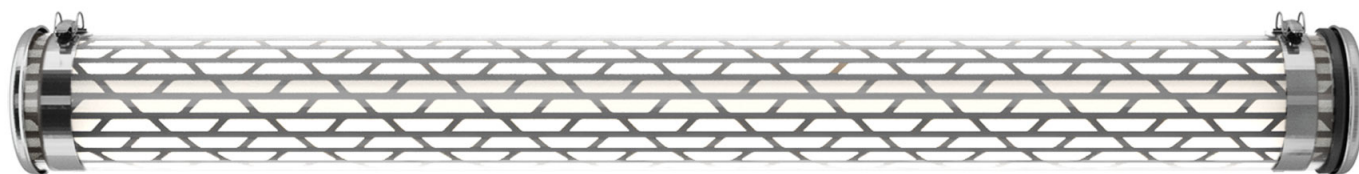

Thanks to light diffused over 360°, the Belleville suspended light fitting can flatter any space with a pleasant and yet well-lit glow. The reinforced flux version can light up large areas while guaranteeing visual comfort. The Belleville luminaire is both functional and well designed, making it ideal to highlight architectural sites.






Belleville

ø133 Suspended light fitting for diffuse 360° lighting



Sammode

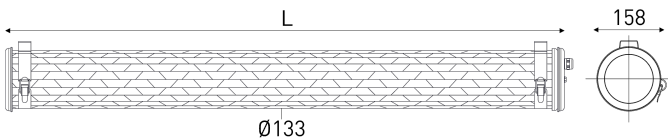

Belleville 360° - Comfortable Flux

3000 K

Flux (lm)	L (mm)	Designation	Code	Watt
1875	995	BELLEVILLE 133 360° S 1000 1875-830 SUSP	80290016	32
2500	1295	BELLEVILLE 133 360° S 1300 2500-830 SUSP	80290013	42
3125	1595	BELLEVILLE 133 360° S 1600 3125-830 SUSP	80290031	52

Other grids available : Monceau or Vendôme





Belleville 360° - Reinforced Flux

3000 K

Flux (lm)	L (mm)	Designation	Code	Watt
3450	995	BELLEVILLE 133 360° S 1000 3450-830 SUSP	80290017	54
4600	1295	BELLEVILLE 133 360° S 1300 4600-830 SUSP	80290032	71
5750	1595	BELLEVILLE 133 360° S 1600 5750-830 SUSP	80290030	89

Other grids available : Monceau or Vendôme

Options

End caps & fixing straps finish	Fixing straps	Materials
 End caps & straps painted Coal RAL7021	 Fixing straps Fixing straps with HSHC screw Fixing straps with tamper-resistant Torx screw	Coextruded polycarbonate/PMMA housing for Indoor/Outdoor use (650°) Polycarbonate housing (960°C) - PO
Grids and colors	Vertical mounting	Color temperature
 Various choices in grids and colors : Refer to us	 Straps and wires for vertical suspension	2700K 827 3000K 830 4000K 840
		Lighting management
		Electronic gear unit for DALI dimming RD Electronic gear unit for push button RS Switch-off warning function (for sensor/timer) RC Casambi Bluetooth control RB
		Electrical class
		Class I CL1 Class II -

Accessories

To be ordered separately



Stainless steel cable plate kit (IP40)	17500020	Pre-cabling 3m 3G1.5 (3 wires) Braided tinned copper cable	CAB0008
		Pre-cabling 3m 5G1.5 (5 wires) Braided tinned copper cable	CAB0011



Sammode


Belleville

Ø133 Suspended light fitting for diffuse 360° lighting

Specification



Photometry



cd/klm
C0 - C180 - - - C90 - C270

1% = 100%

ULR = 50%

Design

Designer Normal Studio

Technical characteristics

Light source High-efficiency removable LED module (CRI>80, 3 SDCM)
50 000 h L80/B10 at 25°C
Photobiological hazard : None (RG0)

Optics Specific satin-finish primary diffuser optics
Use of a satin-finish housing or internal film for a homogeneous light distribution

Lighting comfort Luminance control through diffusing optical systems
Omnidirectional lighting with high lighting comfort

Control gear Constant current driver (non-dimmable)

Supply voltage 220-240V 50/60Hz

Electrical class Class II

Operating temperature -20°C to +30°C

Easy intallation and maintenance

Connection With nickel-coated brass cable gland for cable Ø 5-14 mm
To a 3 x 2,5 mm² disconnectable terminal block

Opening and closing Quick, with just one screw

Mounting 2 stainless steel fixing straps (with variable centre distance)
Provided with 2 suspension kits and 3 m of steel wire

LED engine maintenance Patented sliding maintenance system
Easily removable LED modules and driver

Materials

Internal grid Stainless steel grid

Housing Ø133 Co-extruded polycarbonate/PMMA for inside/outside use

End caps and fixing straps 304L stainless steel

Standards

Waterproofness IP66, IP68, IP69K

Resistance to IK shocks IK10

Fire resistance 650°C