




Gounod

ø133 Wall light fitting for directional lighting



Offering optimal transparency and reflection, this majestic wall fitting with directional lighting is the extra-wide version of the emblematic Elgar model. Its metallic louvre with inclined flow-breaker slats, available in 5 exclusive finishes, creates soft and comfortable lighting. Its striking dimensions and high light output levels make the Gounod wall light the go-to solution for the lighting of large spaces, whether positioned near to the ground, akin to a beacon, or as a long wall fitting to punctuate the space.

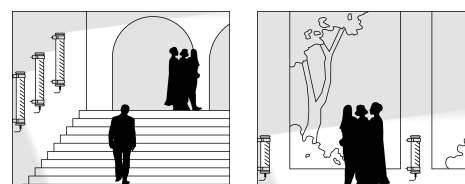




Gounod

ø133 Wall light fitting for directional lighting



Sammode







Principal part numbers

3000 K

Reflector	Flux (lm)	L (mm)	Designation	Code	Watt
Silver	2700	995	GOUNOD 133 S 1000 2700-830	16556040	31
	3600	1295	GOUNOD 133 S 1300 3600-830	16556050	39
	4500	1595	GOUNOD 133 S 1600 4500-830	16556060	51
Copper	2700	995	GOUNOD 133 C 1000 2700-830	16557105	31
	3600	1295	GOUNOD 133 C 1300 3600-830	16557106	39
	4500	1595	GOUNOD 133 C 1600 4500-830	16557107	51
Brass	2700	995	GOUNOD 133 B 1000 2700-830	16557111	44
	3600	1295	GOUNOD 133 B 1300 3600-830	16557112	57
	4500	1595	GOUNOD 133 B 1600 4500-830	16557113	70
Petrol	2700	995	GOUNOD 133 P 1000 2700-830	16557114	44
	3600	1295	GOUNOD 133 P 1300 3600-830	16557115	57
	4500	1595	GOUNOD 133 P 1600 4500-830	16557116	70

Options

End caps & fixing straps finish	Fixing straps	Color temperature
 End caps & straps painted Coal RAL7021	 Fixing straps Fixing straps with HSHC screw Fixing straps with tamper-resistant Torx screw	2700K 827
		3000K 830
		4000K 840
Aluminium gear unit cover	Materials	Lighting management
 Silver Copper Brass Petrol	Coextruded polycarbonate/PMMA housing for Indoor/Outdoor use (650°) Polycarbonate housing (960°C) End caps & fixing straps 304L stainless steel End caps & fixing straps 316L stainless steel CRS CRC CRB CRP	Electronic gear unit for DALI dimming RD
		Electronic gear unit for push button RS
		Switch-off warning function (for sensor/timer) RC
 Silver Copper Brass Petrol	Class I Class II PO MR	Casambi Bluetooth control RB
		Electrical class
		CL1

Accessories

To be ordered separately



Stainless steel cable plate kit (IP40)

17500020



Pre-cabling 1,5m 3G1.5 (3 wires) CAB0007
Braided tinned copper cable
Pre-cabling 1,5m 5G1.5 (3 wires) CAB0010
Braided tinned copper cable



Vertical suspension kit

17500172



Gounod


ø133 Wall light fitting for directional lighting



Specification



Photometry



ULR = 32%

Technical characteristics	
Light source	High-efficiency removable LED module (CRI>80, 3 SDCM) 50 000 h L80/B10 at 25°C Photobiological hazard : None (RG0)
Optics	Extensive reflector with louvre Specific satin-finish primary diffuser optics
Lighting comfort	Louvre in brushed aluminium with inclined lamina
Control gear	Constant current driver (non-dimmable)
Supply voltage	220-240V 50/60Hz
Electrical class	Class II
Operating temperature	-20°C to +35°C
Easy intallation and maintenance	
Connection	With nickel-coated brass cable gland for cable Ø 5-14 mm To a 3 x 2,5 mm² disconnectable terminal block Installation in vertical position: cable gland positioned downwards
Opening and closing	Quick, with just one screw
Mounting	2 stainless steel fixing straps (with variable centre distance)
LED engine maintenance	Patented sliding maintenance system Easily removable LED modules and driver
Materials	
Internal grid	Aluminium louvre
Housing	Ø133 Co-extruded polycarbonate/PMMA for inside/outside use
End caps and fixing straps	304L stainless steel
Standards	
Waterproofness	IP66, IP68, IP69K
Resistance to IK shocks	IK10
Fire resistance	650°C