

MOD Duo

Double ceiling / Wall light fitting



MOD Duo


Double ceiling / Wall light fitting



Sammode



Conceived by the German designer Stefan Diez for Sammode, the MOD Duo invites you to have fun, with its two swivelling heads on their track hoops to diffuse its light in all directions. Made entirely of anodised aluminium, its elegant casing hides its two drivers and locks in an instant thanks to an ingenious snaplock tab. As wall light or ceiling light, you can accessorise its Black or Bronze version with a tinted shade to bring a sense of character and modernity to your spaces.

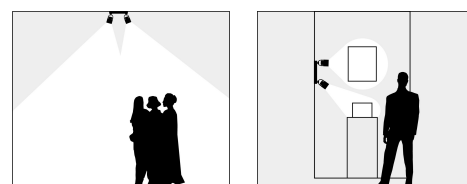




MOD Duo

Double ceiling / Wall light fitting



Sammode

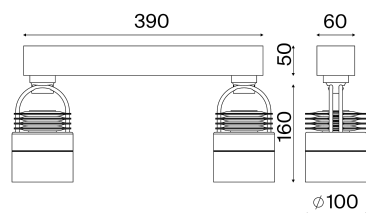

Collimator version

2 x 900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD DUO S 900-927 BL-S SB	88100122	26
Black	Black	MOD DUO BK 900-927 BL-BK SB	88100125	26
Champagne	Champagne	MOD DUO CH 900-927 BL-CH SB	88100028	26
Bronze	Bronze	MOD DUO BZ 900-927 BL-BZ SB	88100029	26

Perforated collimator version


2 x 900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD DUO S 900-927 GR-S WB	88100123	26
Black	Black	MOD DUO BK 900-927 GR-BK WB	88100126	26
Champagne	Champagne	MOD DUO CH 900-927 GR-CH WB	88100032	26
Bronze	Bronze	MOD DUO BZ 900-927 GR-BZ WB	88100033	26





Glass version

2 x 900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Clear	MOD DUO S 900-927 GL-CL	88100124	26
Black	Green	MOD DUO BK 900-927 GL-GN	88100127	26
Champagne	Amber	MOD DUO CH 900-927 GL-AM	88100036	26
Bronze	Smoked	MOD DUO BZ 900-927 GL-SM	88100037	26

Options

Collimator in anodised aluminium	Perforated collimator in anodised aluminium	Tempered glass shade
		
Silver Black Champagne Bronze	BL-S BL-BK BL-CH BL-BZ Silver Black Champagne Bronze	GR-S GR-BK GR-CH GR-BZ Frosted Clear Green Amber Smoked
GL-F GL-C GL-G GL-AM GL-SM		
Lenses	Color temperature	
	2700K 3000K 4000K	927 930 940
Spot Beam 20° Medium Beam 30° Wide Beam 50°	SB MB WB Electronic gear unit for DALI dimming Casambi Bluetooth control	RD RB



MOD Duo

Double ceiling / Wall light fitting



Accessories




The interchangeable crowns and lenses can be ordered separately. Refer to us


Specification




Photometry



Collimator + Spot Beam Lens



Perforated collimator + Wide Beam Lens



Clear or tinted glass shade + Medium Beam Lens

Design	
Designer	Stefan Diez
Technical characteristics	
Light source	CoB LED Module 900 lm (without endcap, IRC>90, 3SDCM) 50 000 h L80/B10 at 25°C Photobiological hazard : Group 1
Control gear	Constant current driver (non-dimmable)
Supply voltage	220-240V 50/60Hz
Electrical class	Class I
Operating temperature	-5 °C to +35 °C
Easy intallation and maintenance	
Connection	To a 3 x 2,5 mm² terminal block
Mounting	Power supply box for surface mounting
Materials	
Head and device housing	Color anodizing Aluminium, nickel-plated copper hoop
Endcap	Full or perforated collimator : Color anodizing Aluminium Glass : tinted or clear tempered glass, according to versions
Lens	Tempered glass
Standards	
Waterproofness	IP20 (indoor use)
Fire resistance	850°C