

# MOD Mono

Ceiling / Wall light fitting




# MOD Mono

Ceiling / Wall light fitting



Conceived by the German designer Stefan Diez for Sammode, the MOD Mono wall lamp is particularly easy to install, in refurbishment projects for example. Made entirely of anodised aluminium, the head of this lamp slides on a double hoop so that it can be swivelled in any direction. Its pattern hides the driver and locks in an instant. In its sober Silver finish, it will highlight the nuances of the architecture with the intense light from its collimator, or alternatively you can select a clear glass shade for a softer light.

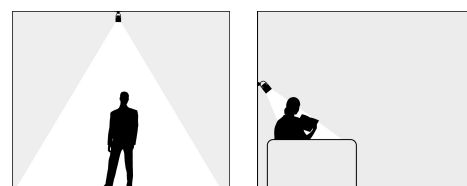




# MOD Mono

Ceiling / Wall light fitting



Sammode



## Collimator version

900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD MONO S 900-927 BL-S SB	88100116	13
Black	Black	MOD MONO BK 900-927 BL-BK SB	88100119	13
Champagne	Champagne	MOD MONO CH 900-927 BL-CH SB	88100016	13
Bronze	Bronze	MOD MONO BZ 900-927 BL-BZ SB	88100017	13

## Perforated collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD MONO S 900-927 GR-S WB	88100117	13
Black	Black	MOD MONO BK 900-927 GR-BK WB	88100120	13
Champagne	Champagne	MOD MONO CH 900-927 GR-CH WB	88100020	13
Bronze	Bronze	MOD MONO BZ 900-927 GR-BZ WB	88100021	13





## Glass version

900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Clear	MOD MONO S 900-927 GL-CL	88100118	13
Black	Green	MOD MONO BK 900-927 GL-GN	88100121	13
Champagne	Amber	MOD MONO CH 900-927 GL-AM	88100024	13
Bronze	Smoked	MOD MONO BZ 900-927 GL-SM	88100025	13

## Options

Collimator in anodised aluminium		Perforated collimator in anodised aluminium		Tempered glass shade	
					
Silver Black Champagne Bronze	BL-S BL-BK BL-CH BL-BZ	Silver Black Champagne Bronze	GR-S GR-BK GR-CH GR-BZ	Frosted Clear Green Amber Smoked	GL-FR GL-CL GL-GN GL-AM GL-SM
Lenses		Color temperature			
		2700K 3000K 4000K	927 930 940		
Spot Beam 20° Medium Beam 30° Wide Beam 50°	SB MB WB	Lighting management			
		Electronic gear unit for DALI dimming Casambi Bluetooth control	RD RB		



# MOD Mono

Ceiling / Wall light fitting



Sammode

## Accessories




The interchangeable crowns and lenses can be ordered separately. Refer to us


## Specification




### Photometry



Collimator + Spot Beam Lens



Perforated collimator + Wide Beam Lens



Clear or tinted glass shade + Medium Beam Lens

Design	
Designer	Stefan Diez
Technical characteristics	
Light source	CoB LED Module 900 lm (without endcap, IRC>90, 3SDCM) 50 000 h L80/B10 at 25°C Photobiological hazard : Group 1
Control gear	Constant current driver (non-dimmable)
Supply voltage	220-240V 50/60Hz
Electrical class	Class I
Operating temperature	-5 °C to +35 °C
Easy intallation and maintenance	
Connection	To a 3 x 2,5 mm² terminal block
Mounting	Power supply box for surface mounting
Materials	
Head and device housing	Color anodizing Aluminium, nickel-plated copper hoop
Endcap	Full or perforated collimator : Color anodizing Aluminium Glass : tinted or clear tempered glass, according to versions
Lens	Tempered glass
Standards	
Waterproofness	IP20 (indoor use)
Fire resistance	850°C