

MOD Recessed

Ceiling / Wall light fitting with recessed housing




MOD Recessed

Ceiling / Wall light fitting with recessed housing



Conceived by the designer Stefan Diez for Sammode, the MOD Recessed is made entirely of anodised aluminium, right down to the decorative wall disk. Its driver is hidden in a cavity wall or false ceiling, so that the head of the lamp is all that is visible. Sliding on a double conductive hoop so that it can be swivelled in any direction, it lends itself to a wide variety of uses as both wall and ceiling lamp. Equipped with a perforated collimator or tinted glass shade, it will bathe the space in its delicate illumination.

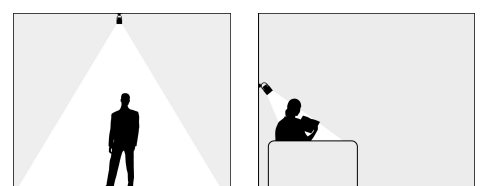




MOD Recessed

Ceiling / Wall light fitting with recessed housing



Sammode



Collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD RCSD S 900-927 BL-S SB	88100110	13
Black	Black	MOD RCSD BK 900-927 BL-BK SB	88100113	13
Champagne	Champagne	MOD RCSD CH 900-927 BL-CH SB	88100004	13
Bronze	Bronze	MOD RCSD BZ 900-927 BL-BZ SB	88100005	13

Perforated collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD RCSD S 900-927 GR-S WB	88100111	13
Black	Black	MOD RCSD BK 900-927 GR-BK WB	88100114	13
Champagne	Champagne	MOD RCSD CH 900-927 GR-CH WB	88100008	13
Bronze	Bronze	MOD RCSD BZ 900-927 GR-BZ WB	88100009	13

Glass version

900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Clear	MOD RCSD S 900-927 GL-CL	88100112	13
Black	Green	MOD RCSD BK 900-927 GL-GN	88100115	13
Champagne	Amber	MOD RCSD CH 900-927 GL-AM	88100012	13
Bronze	Smoked	MOD RCSD BZ 900-927 GL-SM	88100013	13

Options

Collimator in anodised aluminium



Silver
Black
Champagne
Bronze

Perforated collimator in anodised aluminium



BL-S
BL-BK
BL-CH
BL-BZ
Silver
Black
Champagne
Bronze

Tempered glass shade



Frosted
Clear
Green
Amber
Smoked

GL-FR
GL-CL
GL-GN
GL-AM
GL-SM

Lenses



Spot Beam 20°
Medium Beam 30°
Wide Beam 50°

Color temperature

2700K	927
3000K	930
4000K	940

Lighting management

SB
MB
WB
Electronic gear unit for DALI
dimming
Casambi Bluetooth control

RD
RB



MOD Recessed

Ceiling / Wall light fitting with recessed housing




Accessories




The interchangeable crowns and lenses can be ordered separately. Refer to us


Specification




Photometry



Collimator + Spot Beam Lens



Perforated collimator + Wide Beam Lens



Clear or tinted glass shade + Medium Beam Lens

Design

Designer Stefan Diez

Technical characteristics

Light source CoB LED Module 900 lm (without endcap, IRC>90, 3SDCM)
50 000 h L80/B10 at 25°C
Photobiological hazard : Group 1

Control gear Constant current driver (non-dimmable)

Supply voltage 220-240V 50/60Hz

Electrical class Class I

Operating temperature -5 °C to +35 °C

Easy intallation and maintenance

Connection Prewired driver, fitted with a male-female Wieland coupling

Mounting Hollow wall attachment for tightening, wall thickness : 30 mm max

Installation hole diameter : 83 mm

Empty plenum space 200 x 300 mm, height : 100 mm

Materials

Head and covering plate Color anodizing Aluminium, nickel-plated copper hoop

Endcap Full or perforated collimator : Color anodizing Aluminium
Glass : tinted or clear tempered glass, according to versions

Lens Tempered glass

Standards

Waterproofness IP20 (indoor use)

Fire resistance 850°C