

# MOD Recessed

Ceiling / Wall light fitting with recessed housing




# MOD Recessed

Ceiling / Wall light fitting with recessed housing




Conceived by the designer Stefan Diez for Sammode, the MOD Recessed is made entirely of anodised aluminium, right down to the decorative wall disk. Its driver is hidden in a cavity wall or false ceiling, so that the head of the lamp is all that is visible. Sliding on a double conductive hoop so that it can be swivelled in any direction, it lends itself to a wide variety of uses as both wall and ceiling lamp. Equipped with a perforated collimator or tinted glass shade, it will bathe the space in its delicate illumination.

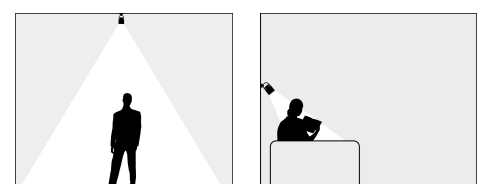



# MOD Recessed

Ceiling / Wall light fitting with recessed housing



## Collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD RCSD S 900-927 BL-S SB	88100110	13
Black	Black	MOD RCSD BK 900-927 BL-BK SB	88100113	13
Champagne	Champagne	MOD RCSD CH 900-927 BL-CH SB	88100004	13
Bronze	Bronze	MOD RCSD BZ 900-927 BL-BZ SB	88100005	13

## Perforated collimator version


900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Silver	MOD RCSD S 900-927 GR-S WB	88100111	13
Black	Black	MOD RCSD BK 900-927 GR-BK WB	88100114	13
Champagne	Champagne	MOD RCSD CH 900-927 GR-CH WB	88100008	13
Bronze	Bronze	MOD RCSD BZ 900-927 GR-BZ WB	88100009	13

## Glass version

900 lm, 2700 K



Finishing	Endcap	Designation	Code	Watt
Silver	Clear	MOD RCSD S 900-927 GL-CL	88100112	13
Black	Green	MOD RCSD BK 900-927 GL-GN	88100115	13
Champagne	Amber	MOD RCSD CH 900-927 GL-AM	88100012	13
Bronze	Smoked	MOD RCSD BZ 900-927 GL-SM	88100013	13

## Options

Collimator in anodised aluminium	Perforated collimator in anodised aluminium	Tempered glass shade
Silver Black Champagne Bronze	BL-S BL-BK BL-CH BL-BZ Silver Black Champagne Bronze	GR-S GR-BK GR-CH GR-BZ Frosted Clear Green Amber Smoked
GL-FR GL-CL GL-GN GL-AM GL-SM		
Lenses	Color temperature	
	2700K 3000K 4000K	927 930 940
Spot Beam 20° Medium Beam 30° Wide Beam 50°	SB MB WB Lighting management	
	Electronic gear unit for DALI 2 dimming Casambi Bluetooth control	RD RB



# MOD Recessed

Ceiling / Wall light fitting with recessed housing




Sammode

## Accessories




The interchangeable crowns and lenses can be ordered separately. Refer to us


## Specification




### Photometry



Collimator + Spot Beam Lens



Perforated collimator + Wide Beam Lens



Clear or tinted glass shade + Medium Beam Lens

Design	
Designer	Stefan Diez
Technical characteristics	
Light source	CoB LED Module 900 lm (without endcap, IRC>90, 3SDCM) 50 000 h L80/B10 at 25°C Photobiological hazard : Group 1
Control gear	Constant current driver (non-dimmable)
Supply voltage	220-240V 50/60Hz
Electrical class	Class I
Operating temperature	-5 °C to +35 °C
Easy intallation and maintenance	
Connection	Prewired driver, fitted with a male-female Wieland coupling
Mounting	Hollow wall attachment for tightening, wall thickness : 30 mm max
Installation hole	diameter : 83 mm
Empty plenum space	200 x 300 mm, height : 100 mm
Materials	
Head and covering plate	Color anodizing Aluminium, nickel-plated copper hoop
Endcap	Full or perforated collimator : Color anodizing Aluminium Glass : tinted or clear tempered glass, according to versions
Lens	Tempered glass
Standards	
Waterproofness	IP20 (indoor use)
Fire resistance	850°C