

# Pissarro

Ceiling light fitting with longitudinal louvre ø100




# Pissarro


Ceiling light fitting with longitudinal louvre ø100



Sammode

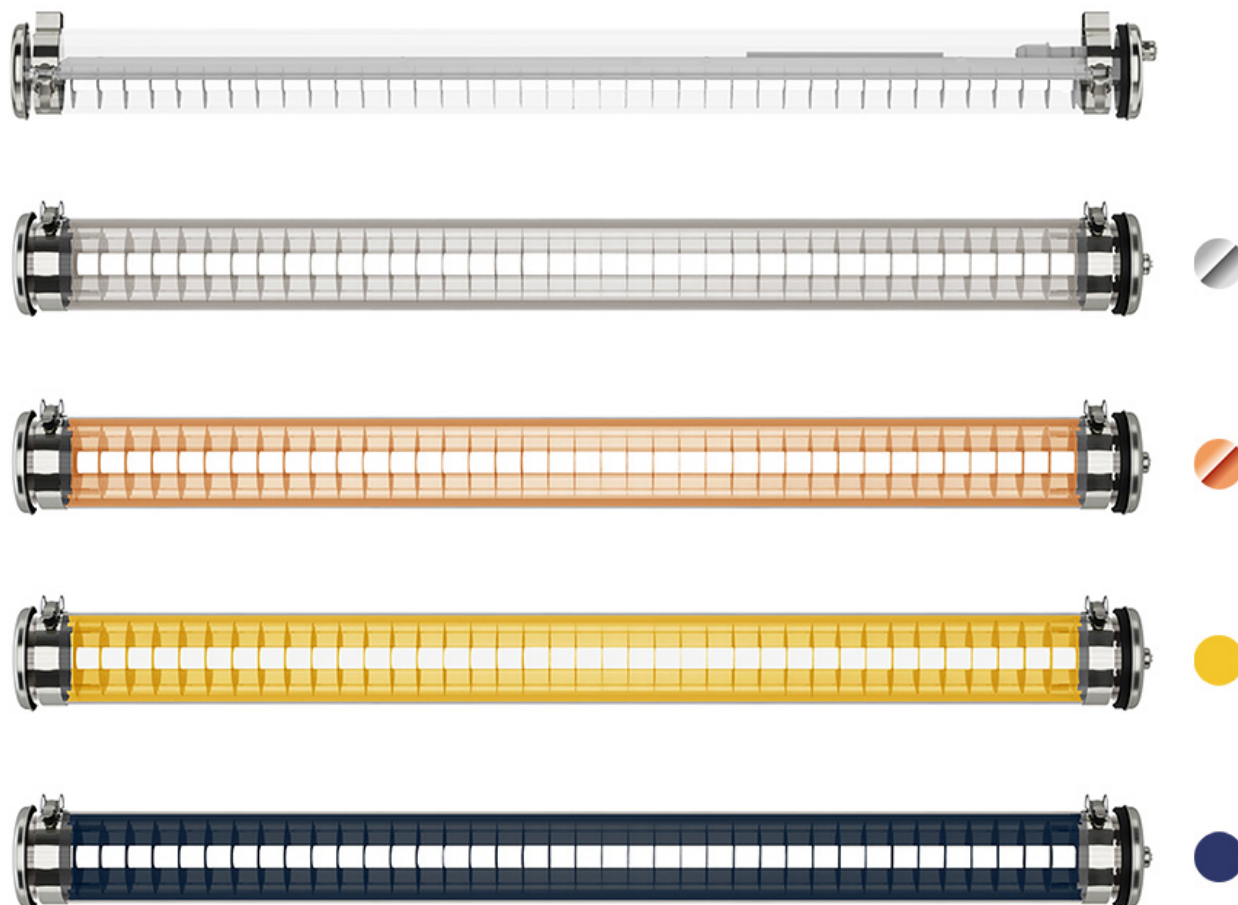

Its aluminium slats, specifically designed for the Pissarro, perfectly conceal the LED source longitudinally, while producing pleasant diffuse lighting. Thanks to this unique optical mechanism, the Pissarro offers a perfect balance between design and lighting comfort. It subtly illuminates every corner of spaces requiring high lighting levels. Add a design touch and customise your projects with a choice of 5 exclusive finishes.

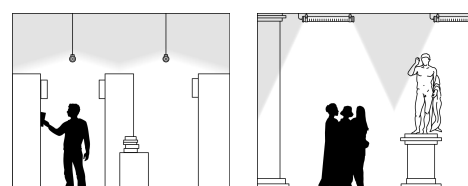




# Pissarro

Ceiling light fitting with longitudinal louvre ø100



Sammode

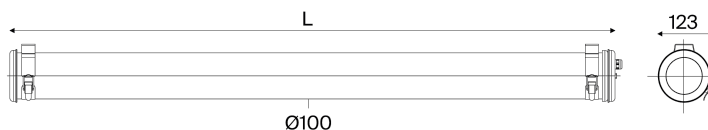




## Principal part numbers

3000 K

Reflector	Flux (lm)	L (mm)	Designation	Code	Watt
Silver	2100	1018	PISSARRO 100 S 1000 2100-830	15847040	24
	2800	1318	PISSARRO 100 S 1300 2800-830	15847050	32
	3500	1618	PISSARRO 100 S 1600 3500-830	15847060	39
Copper	2100	1018	PISSARRO 100 C 1000 2100-830	15847104	24
	2800	1318	PISSARRO 100 C 1300 2800-830	15847105	32
	3500	1618	PISSARRO 100 C 1600 3500-830	15847106	39
Brass	2100	1018	PISSARRO 100 B 1000 2100-830	15847110	24
	2800	1318	PISSARRO 100 B 1300 2800-830	15847111	32
	3500	1618	PISSARRO 100 B 1600 3500-830	15847112	39
Petrol	2100	1018	PISSARRO 100 P 1000 2100-830	15847113	32
	2800	1318	PISSARRO 100 P 1300 2800-830	15847114	43
	3500	1618	PISSARRO 100 P 1600 3500-830	15847115	52

## Options

End caps & fixing straps finish	Fixing straps	Color temperature
 End caps & straps painted Coal RAL7021	 Fixing straps Fixing straps with HSHC screw Fixing straps with tamper-resistant Torx screw	2700K 827 3000K 830 4000K 840
		<b>Lighting management</b> Electronic gear unit for DALI dimming RD Electronic gear unit for push button RS Casambi Bluetooth control RB
		<b>Electrical class</b> Class I CL1 Class II -
Aluminium gear unit cover	Materials	
 Silver Copper Brass Petrol	Coextruded polycarbonate/PMMA housing for Indoor/Outdoor use (650°) Polycarbonate housing (960°C) End caps & fixing straps 304L stainless steel End caps & fixing straps 316L stainless steel	- PO - MR
	CRS CRC CRB CRP	


## Accessories

To be ordered separately



Stainless steel cable plate kit (IP40)

17500020



Horizontal suspension kit (3m ropes)

17500050



Pre-cabling 3m 3G1.5 (3 wires) Braided tinned copper cable CAB0008  
Pre-cabling 3m 5G1.5 (5 wires) Braided tinned copper cable CAB0011



# Pissarro

Ceiling light fitting with longitudinal louvre ø100




Sammode

## Specification



## Photometry



cd/klm  
CO - C180 --- C90 - C270

ULR = 2%

## Technical characteristics

Light source High-efficiency removable LED module (CRI>80, 3 SDCM)  
50 000 h L80/B10 at 25°C  
Photobiological hazard : None (RG0)

Optics Extensive reflector with louvre  
Specific satin-finish primary diffuser optics

Lighting comfort Longitudinal brightness control  
Longitudinal glare control 40°  
Longitudinal UGR ≤25

Control gear Constant current driver (non-dimmable)

Supply voltage 220-240V 50/60Hz

Electrical class Class II

Operating temperature -20°C to +35°C

## Easy installation and maintenance

Connection With nickel-coated brass cable gland for cable Ø 5-14 mm  
To a 3 x 2,5 mm² disconnectable terminal block

Opening and closing Quick, with just one screw

Mounting 2 stainless steel fixing straps (with variable centre distance)

LED engine maintenance Patented sliding maintenance system  
Easily removable LED modules and driver

## Materials

Louvre Aluminium louvre

Housing Ø100 Co-extruded polycarbonate/PMMA for inside/outside use

End caps and fixing straps 304L stainless steel

## Standards

Waterproofness IP66, IP68, IP69K

Resistance to IK shocks IK10

Fire resistance 650°C