

Quadratube P1

Suspended light fitting with a reflector and "Persienne" perforations




Quadratube P1


Suspended light fitting with a reflector and "Persienne" perforations



Sammode

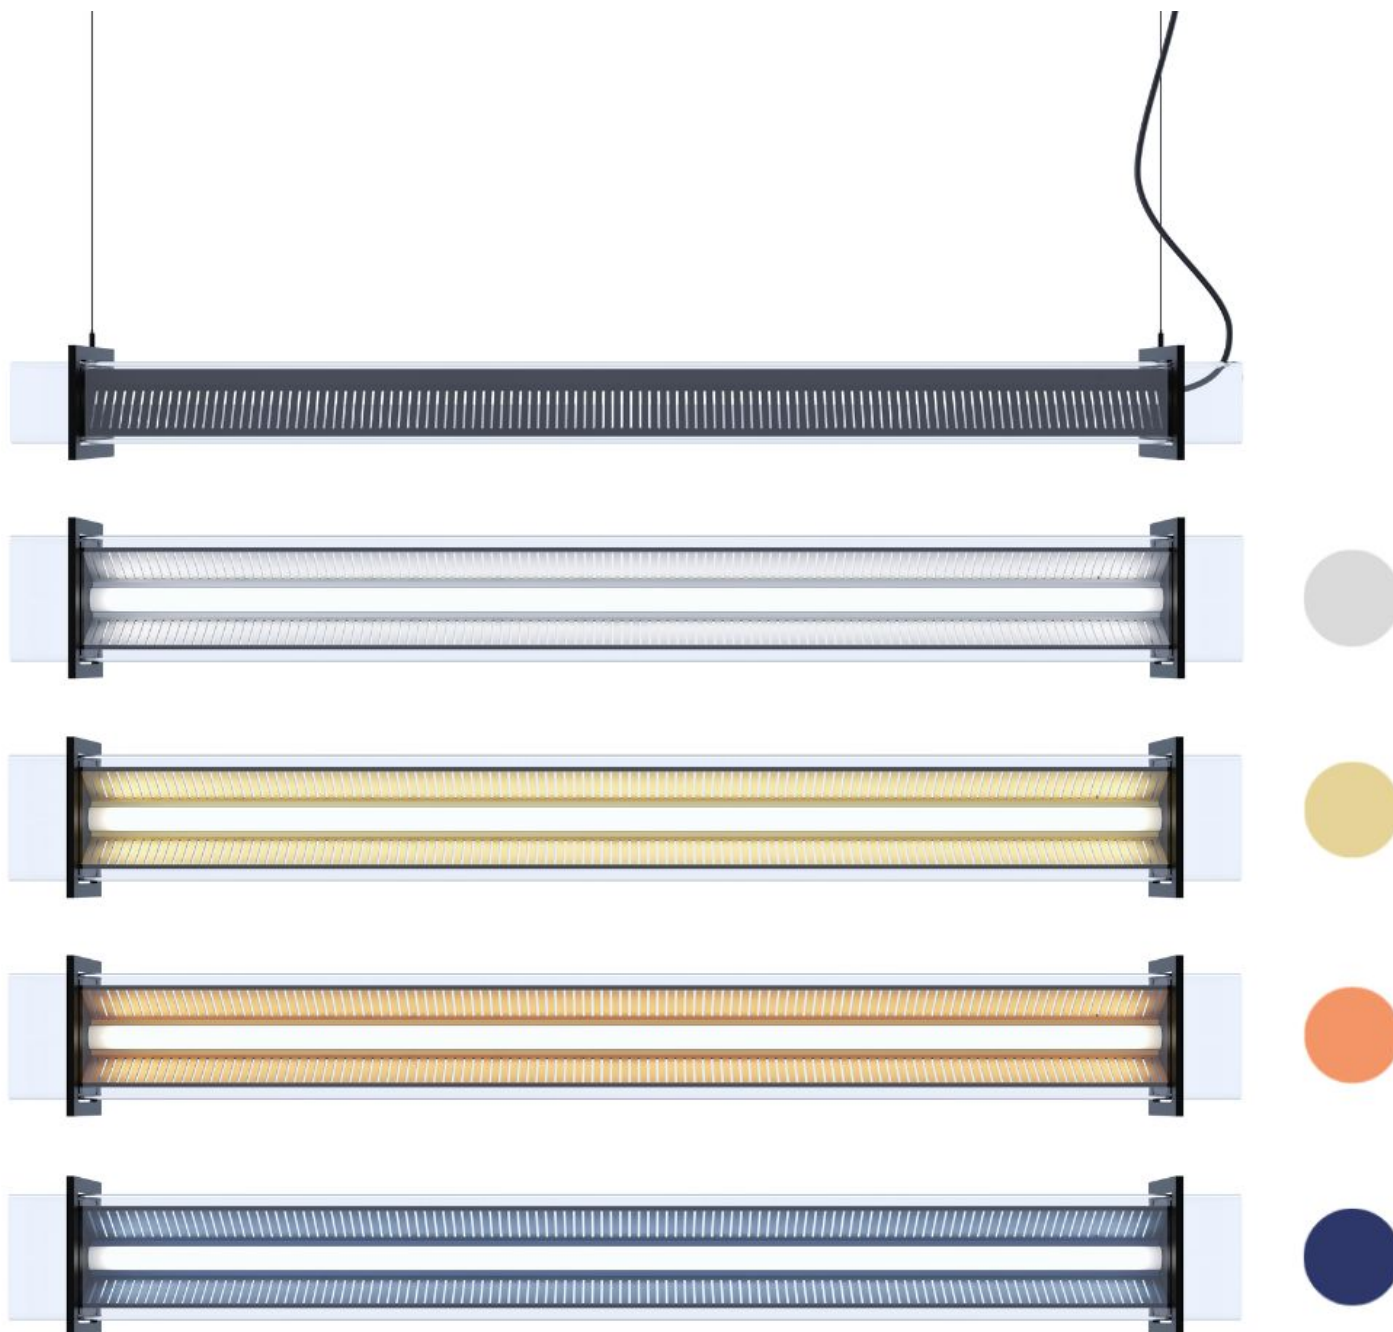

The elegant outline of the P1 suspended light fitting is available in two lengths (1.3 m or 1.6 m). The rectangular louvre-style perforations of this model subtly diffuse light to the sides, creating a cosy pleasant atmosphere, in addition to providing direct lighting. As well as providing lighting, this model incorporates an LED module and reflector for remarkable lighting quality and visual comfort. The power supply cable has been integrated in a notch at the top, reflecting the close attention paid to detail.

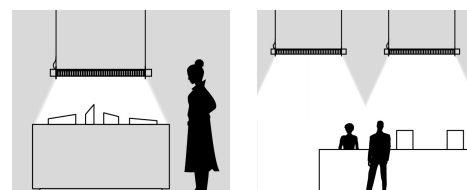




Quadratube P1

Suspended light fitting with a reflector and "Persienne" perforations



Sammode

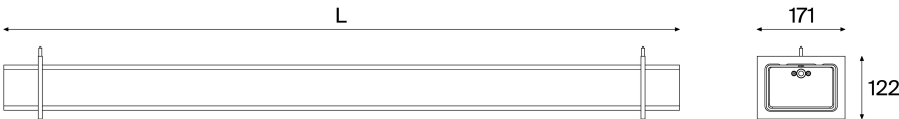

Pendant light

Non dimmable - 2700K

Reflector	Flux (lm)	L (mm)	Designation	Code	Watt
Silver	4540	1316	QT SUSP RE-R S 1300 MP-827 C3M	70100059	40
	5680	1616	QT SUSP RE-R S 1600 MP-827 C3M	70100060	50
Champagne	4330	1316	QT SUSP RE-R CH 1300 MP-827 C3M	70100047	40
	5420	1616	QT SUSP RE-R CH 1600 MP-827 C3M	70100048	50
Copper	4270	1316	QT SUSP RE-R CB 1300 MP-827 C3M	70100042	40
	5340	1616	QT SUSP RE-R CB 1600 MP-827 C3M	70100041	50
Petrol	3500	1316	QT SUSP RE-R P 1300 MP-827 C3M	70100053	40
	4380	1616	QT SUSP RE-R P 1600 MP-827 C3M	70100054	50

A "Low Power" version exists (reduced flux and power)

Pendant light

Casambi dimmer - 2700K

Reflector	Flux (lm)	L (mm)	Designation	Code	Watt
Silver	4540	1316	QT SUSP RE-R S 1300 MP-827 RB C3M	70100006	40
	5680	1616	QT SUSP RE-R S 1600 MP-827 RB C3M	70100015	50
Champagne	4330	1316	QT SUSP RE-R CH 1300 MP-827 RB C3M	70100002	40
	5420	1616	QT SUSP RE-R CH 1600 MP-827 RB C3M	70100011	50
Copper	4270	1316	QT SUSP RE-R CB 1300 MP-827 RB C3M	70100008	40
	5340	1616	QT SUSP RE-R CB 1600 MP-827 RB C3M	70100017	50
Petrol	3500	1316	QT SUSP RE-R P 1300 MP-827 RB C3M	70100004	40
	4380	1616	QT SUSP RE-R P 1600 MP-827 RB C3M	70100013	50

A "Low Power" version exists (reduced flux and power)

Options

Color temperature	Lighting management
2700K	827 Electronic gear unit for DALI
3000K	830/930 dimming RD
4000K	840/940 Electronic gear unit for push button RS
	Switch-off warning function (for sensor/timer) RC
	Permanent standby mode 10% function RCP
	Casambi Bluetooth control RB

