




Rimbaud

ø133 Pendant light



Sammode

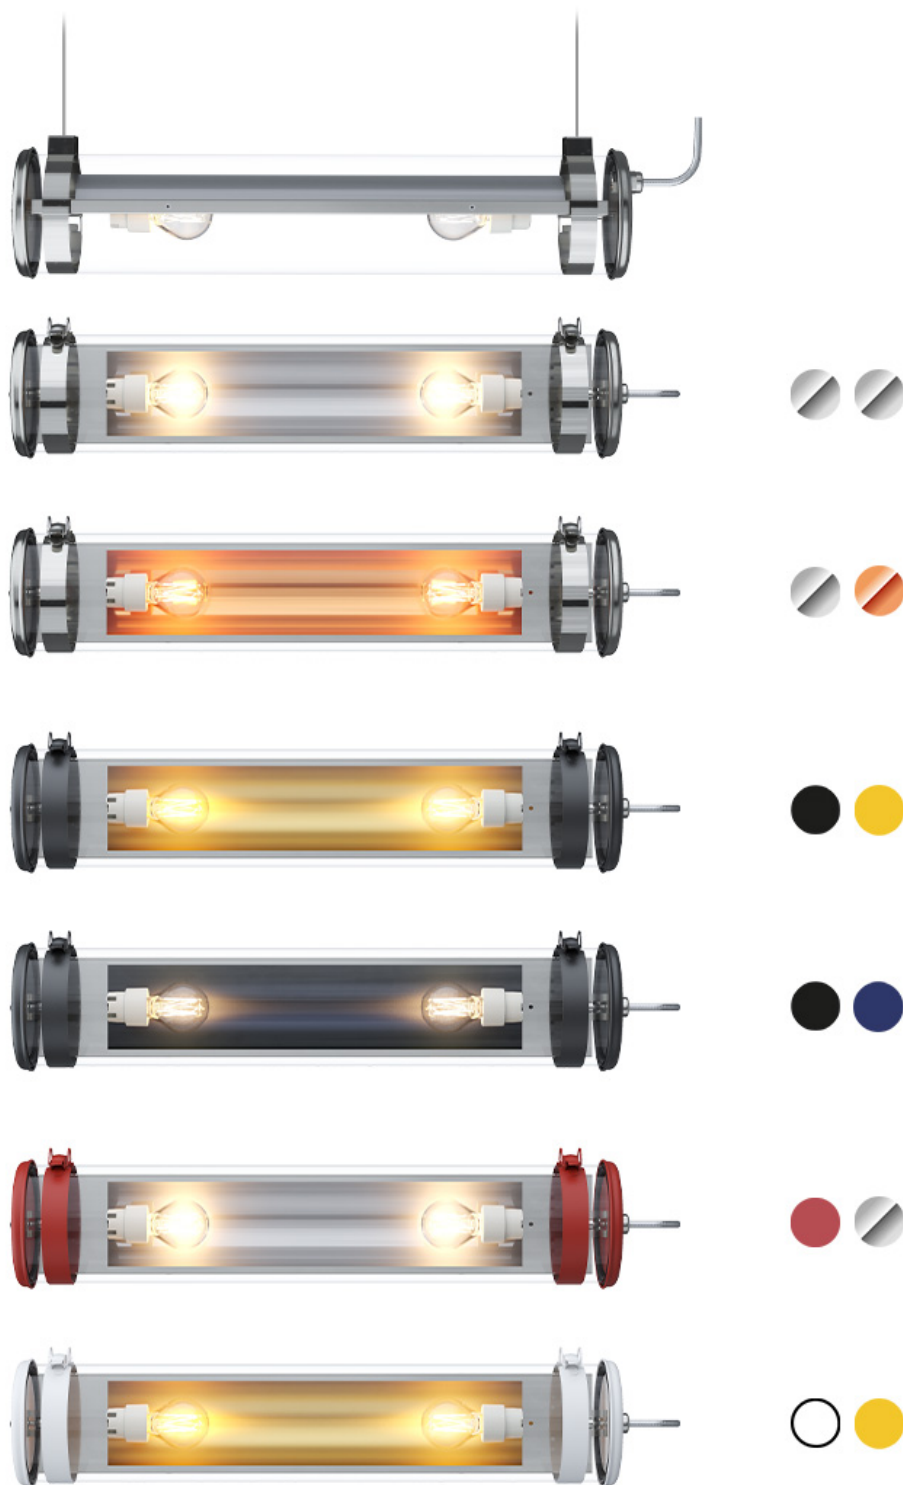

The Rimbaud luminaire, the traditional industrial Sammode icon, can bring great lighting to small and large areas. This model can be fitted as a wall or ceiling light, or carefully suspended on steel wires for a simple finish. The glass body houses two filament LED bulbs guaranteeing a well lit area and visual comfort.




Rimbaud

ø133 Pendant light



Sammode

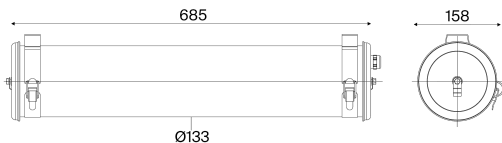

With flux-breaker grid

Finishing	Reflector	Designation	Code
	Silver	RIMBAUD GR 133 S 700 CL1 PY SUSP	16655020
	Copper	RIMBAUD GR 133 C 700 CL1 PY SUSP	16655034
	Brass	RIMBAUD GR 133 COAL B 700 CL1 PY SUSP	16655035
	Petrol	RIMBAUD GR 133 COAL P 700 CL1 PY SUSP	16655036
Marsala	Silver	RIMBAUD GR 133 MARS S 700 CL1 PY SUSP	16655037
White	Brass	RIMBAUD GR 133 WHITE B 700 CL1 PY SUSP	16655038

Without flux-breaker grid

Finishing	Reflector	Designation	Code
	Silver	RIMBAUD 133 S 700 CL1 PY SUSP	16655028
	Copper	RIMBAUD 133 C 700 CL1 PY SUSP	16655029
	Brass	RIMBAUD 133 COAL B 700 CL1 PY SUSP	16655030
	Petrol	RIMBAUD 133 COAL P 700 CL1 PY SUSP	16655031
Marsala	Silver	RIMBAUD 133 MARS S 700 CL1 PY SUSP	16655032
White	Brass	RIMBAUD 133 WHITE B 700 CL1 PY SUSP	16655033

Options

End caps & fixing straps finish	Fixing straps	Materials
End caps & straps painted Coal RAL7021		End caps & fixing straps 304L stainless steel
End caps & straps painted MARSALA RAL3011		End caps & fixing straps 316L stainless steel
End caps & straps painted WHITE RAL9010		
Reflector finish	Fixing straps	-
Silver	Fixing straps with HSHC screw	BRV
Brass		
Copper		
Petrol		

Accessories

To be ordered separately



Stainless steel cable plate kit (IP40)	17500020	Pre-cabing 3m 3G1.5 (3 wires) Braided tinned copper cable	CAB0008	E27 LED filament lamp 4W 2700K matt	17500003
				E27 LED filament lamp 8W 2700K matt	17500004



Rimbaud

ø133 Pendant light



Sammode

Specification



Technical characteristics

Light source	2 E27 lamps, 11W max, not included
Supply voltage	220-240V 50/60Hz
Electrical class	Class I
Operating temperature	-20°C to +35°C

Easy intallation and maintenance

Connection	With nickel-coated brass cable gland for cable Ø 5-14 mm To a 3 x 2,5 mm ² disconnectable terminal block
Mounting	Attachement with 2 bolt-fitted stainless steel straps with variable center distance and 360° orientation Provided with 2 suspension kits and 3 m of steel wire
Maintenance	Maintenance by releasing the 2 closing screws, removing the end cap and extracting the gear tray

Materials

Louvre	Stainless steel grid
Housing	Borosilicate-glass
End caps and fixing straps	304L stainless steel

Standards

Waterproofness	IP66, IP68, IP69K
Resistance to IK shocks	IK07
Fire resistance	Non-flammable