


Description

- MONDRIAN tubular light fitting for diffuse lighting
- Comfortable 260° lighting
- External 316L stainless steel gear unit cover
- Housing: UV-resistant co-extruded polycarbonate/PMMA for inside/outside use
- External metal parts in 316L stainless steel and screws in A4 stainless steel
- White powder-coated mounting plate
- Gaskets: Gaskets moulded in EPDM




Light specifications and controlling

- Low consumption led strips, CRI>90
- Luminous flux: 350 lm
- Colour temperature: 2700 K
- Brightness management using a diffuser housing
- Light mixing chamber
- Integrated LED-Driver 220-240V 50/60Hz with constant voltage output

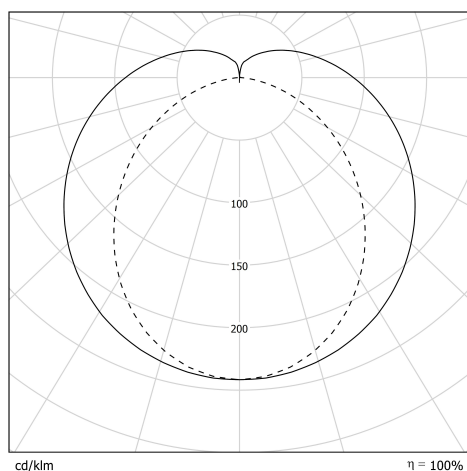

Installation and maintenance

- Diameter: 40 mm
- Length illuminating surface: 426 mm
- Total length: 629 mm
- Cable entry with nickel-coated brass cable gland for cable Ø 5 - 10 mm
- Provided with 1m 3G1,5 cable with tinned copper meshwork under transparent tubing
- 2 fixing straps in stainless steel with HSHC screw in A2 stainless steel with variable centre distance and allowing 360° orientation
- Fixing as wall or ceiling light fitting with 2 316L stainless steel straps
- Provided with stainless steel cable plate 316L, for indoor use (IP 40), for earthing
- Opening and closing by tightening the nut on the cable gland
- Installation vertical: position cable gland positioned downwards
- Maintenance by removal of the end cap and the gear tray



Characteristics

- Warranty : 5 years
- 50 000 h L80/B10 at max. operating temperature
- Operating temperature: -20°C to +30°C
- Protection: IP66/IP68/IP69K
- Resistance to IK shocks: IK10
- Class II
- Power supply: 220-240 V 50/60 Hz
- Power consumption: 5 W
- Inrush current - Ipeak: 27 A
- Photobiological hazard: Group 0
- Peak duration - Twidth: 250 µs
- Fire resistance: 650 °C
- Number of luminaires on automat type B16: 27 pcs
- Weight: 0,9 kg
- Designed and made in France

